


ECG1113

AUDIO AMPLIFIER


- OUTPUT POWER 2.1 W (12 V - 8 Ω)
- LOW DISTORTION
- LOW QUIESCENT CURRENT
- HIGH INPUT IMPEDANCE

The ECG1113 is a monolithic integrated circuit in a 14-lead quad in-line plastic package.

It is particularly designed for use in radio receivers and record-players as audio amplifier. The usable range of supply voltage varies from 6 V to 15 V and the circuit requires a minimum number of external components.

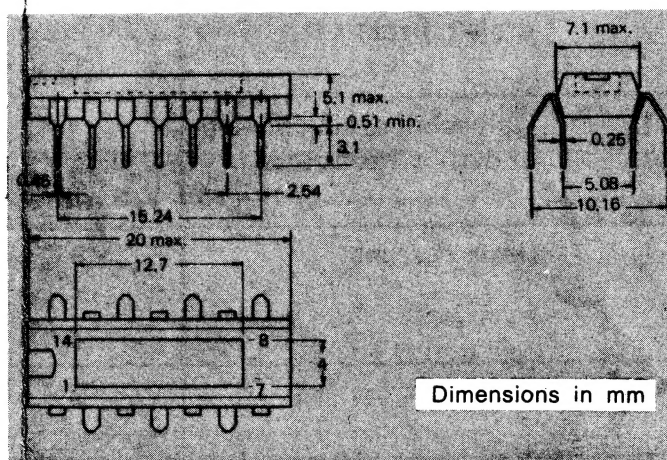


SCHEMATIC DIAGRAM

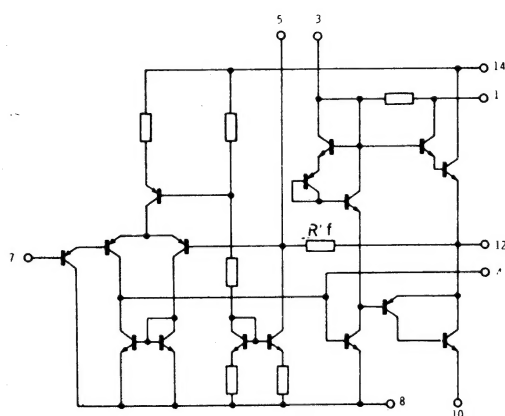

CONNECTION DIAGRAM

(top view)

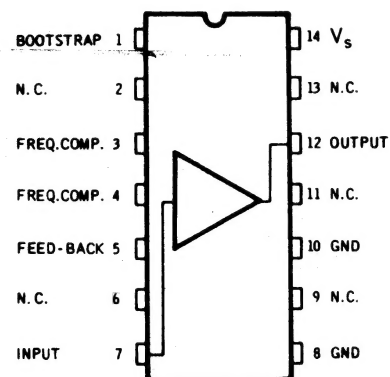

ABSOLUTE MAXIMUM RATINGS

V_s	Supply voltage	15	V
V_i^*	Input voltage	-0.5 to 15	V
I_o	Output peak current	1	A
P_{tot}	Power dissipation at $T_{amb} \leq 25^\circ\text{C}$	1.35	W
T_{stg}	Storage temperature	-55 to 125	$^\circ\text{C}$
T_j	Junction temperature	150	$^\circ\text{C}$

* For $V_s < 15\text{ V}$, $V_{i\text{ max}} = V_s$

THERMAL DATA

$R_{th\ j-amb}$	Thermal resistance junction-ambient	max	93 $^\circ\text{C/W}$
-----------------	-------------------------------------	-----	-----------------------

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_o Quiescent output voltage	$V_s = 9\text{ V}$ $V_s = 12\text{ V}$		4.8 6.3		V V
I_d Total quiescent drain current	$V_s = 9\text{ V}$ $V_s = 12\text{ V}$		3 3.5		mA mA
I_d Quiescent drain current of output transistors	$V_s = 9\text{ V}$ $V_s = 12\text{ V}$		1 1.2		mA mA
I_d Drain current	$R_L = 8\ \Omega$ $P_o = 1.15\text{ W}$ $V_s = 9\text{ V}$ $P_o = 2.1\text{ W}$ $V_s = 12\text{ V}$		170 235		mA mA
I_b Input bias current	$V_s = 9\text{ V}$ $V_s = 12\text{ V}$		60 75		nA nA
P_o Output power	$d = 2\%$ $R_L = 8\ \Omega$ $V_s = 9\text{ V}$ $V_s = 12\text{ V}$ $d = 10\%$ $R_L = 8\ \Omega$ $V_s = 9\text{ V}$ $V_s = 12\text{ V}$		0.9 1.7 1.15 2.1		W W W W
R_f' Internal feedback resistance (see schematic diagram)			7.5		k Ω
Z_i Input impedance	open loop		0.75		M Ω
d Distortion	Test circuit 1 $R_L = 8\ \Omega$ $f = 1\text{ kHz}$ $P_o = 50\text{ mW}$ $V_s = 9\text{ V}$ $P_o = 50\text{ mW}$ $V_s = 12\text{ V}$ $P_o = 0.5\text{ W}$ $V_s = 9\text{ V}$ $P_o = 1\text{ W}$ $V_s = 12\text{ V}$ Test circuit 2 $R_L = 8\ \Omega$ $f = 1\text{ kHz}$ $P_o = 50\text{ mW}$ $V_s = 9\text{ V}$ $P_o = 50\text{ mW}$ $V_s = 12\text{ V}$ $P_o = 0.5\text{ W}$ $V_s = 9\text{ V}$ $P_o = 1\text{ W}$ $V_s = 12\text{ V}$		0.4 0.3 0.3 0.2 1.7 1.5 1.2 1		% % % % % % % %
G_v Voltage gain (open loop)	$R_L = 8\ \Omega$ $V_s = 9\text{ V}$ $R_L = 8\ \Omega$ $V_s = 12\text{ V}$		68 70		dB dB

Fig. 1 - Typical output power vs load resistance

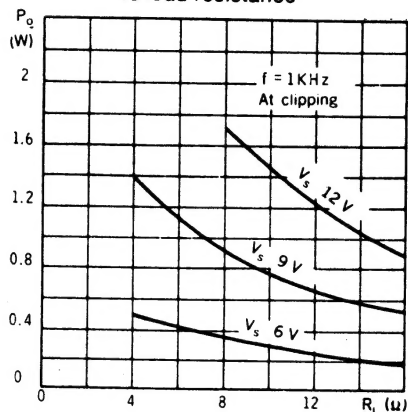


Fig. 2 - Typical output power vs load resistance

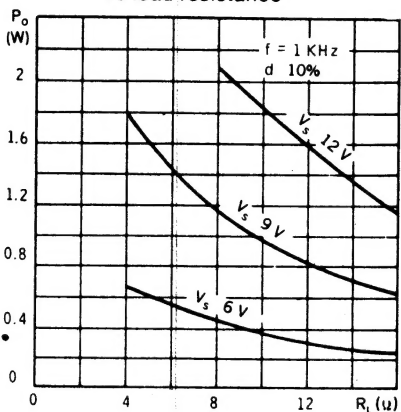


Fig. 3 - Typical distortion vs output power

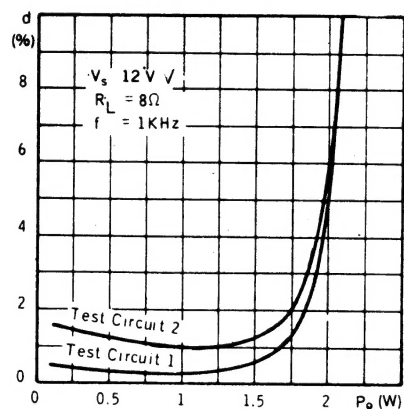


Fig. 4 - Typical distortion vs output power

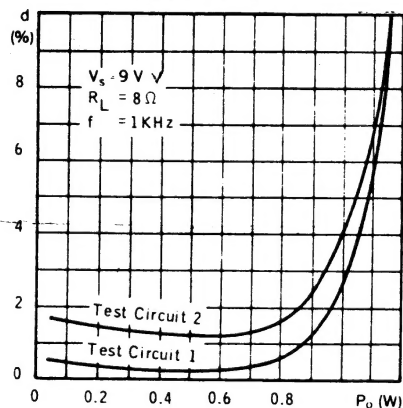


Fig. 5' - Typical voltage gain (open loop) vs frequency

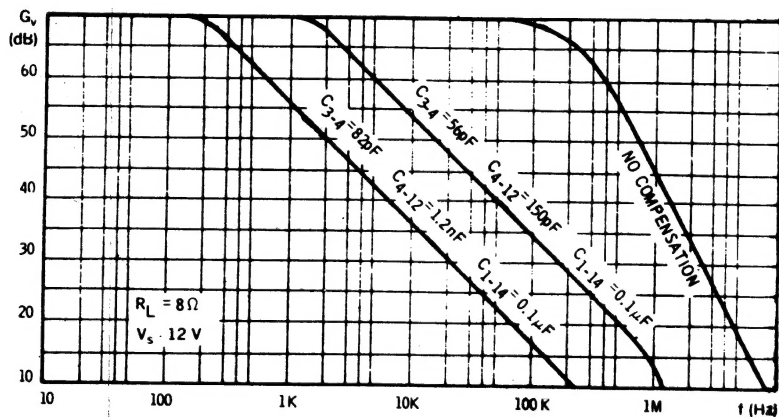


Fig. 6 - Typical relative frequency response

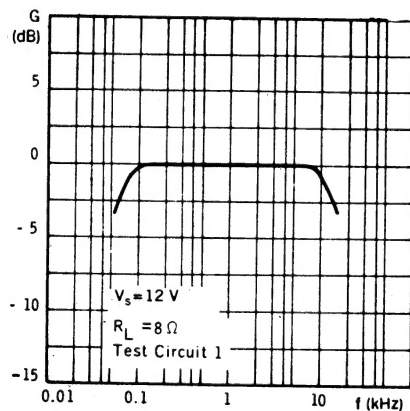


Fig. 7 - Typical relative frequency response

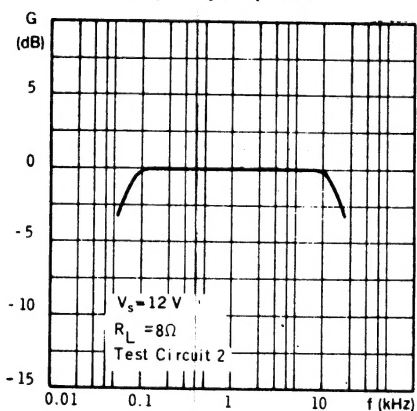


Fig. 8 - Typical output power vs input voltage

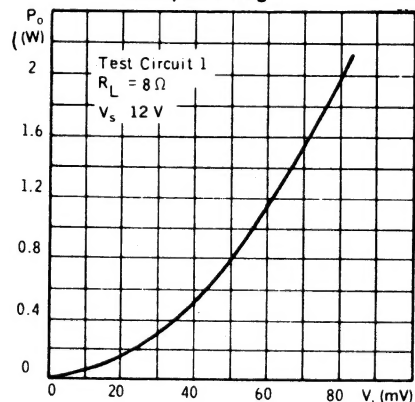


Fig. 9 - Typical output power vs input voltage

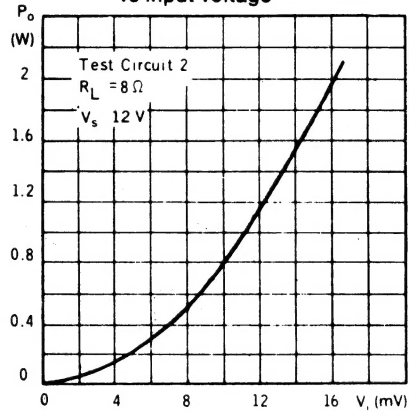


Fig. 10 - Typical power dissipation and efficiency vs output power

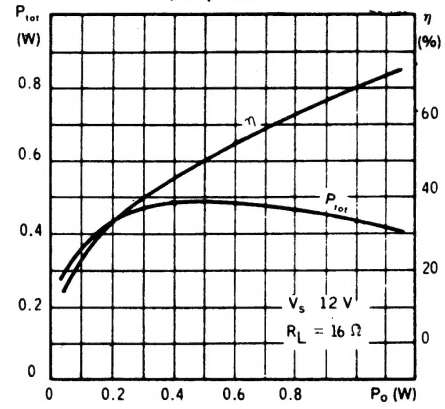


Fig. 11 - Typical power dissipation and efficiency vs output power

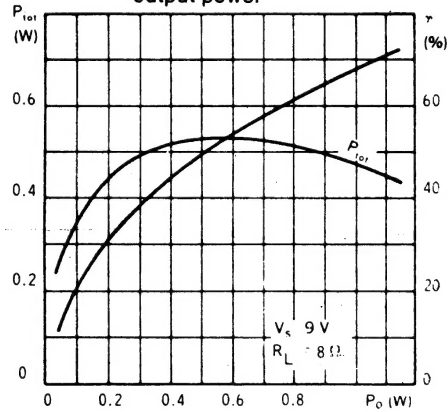


Fig. 12 - Typical power dissipation and efficiency vs output power

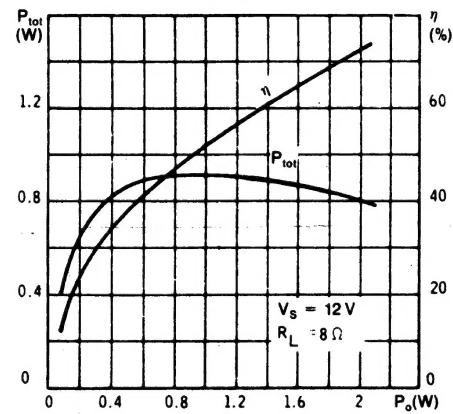


Fig. 13 - Typical drain current vs output power

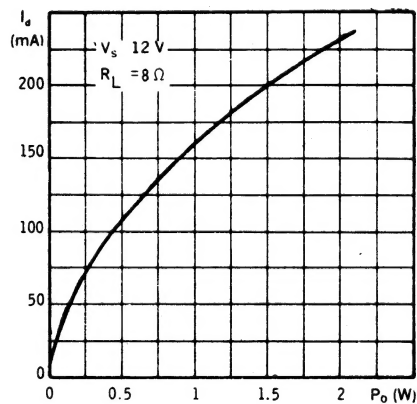


Fig. 14 - Maximum power dissipation vs load resistance

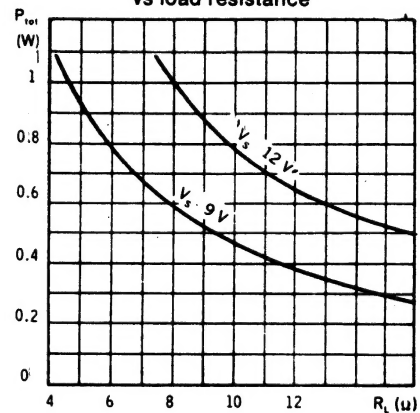


Fig. 15 - Power rating chart

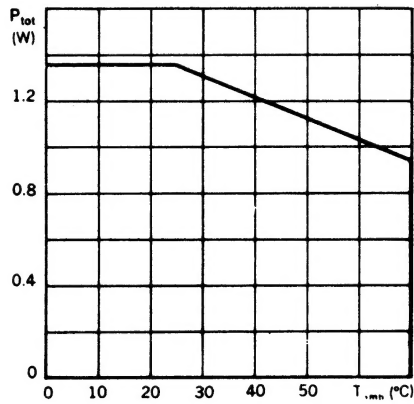


Fig. 16 - Typical quiescent drain current vs supply voltage

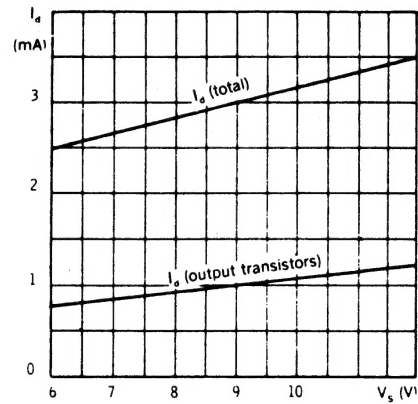


Fig. 17 - Typical quiescent drain current vs ambient temperature



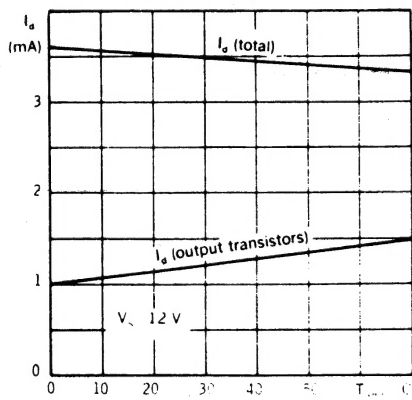


Fig. 18 - Quiescent output voltage variation vs ambient temperature

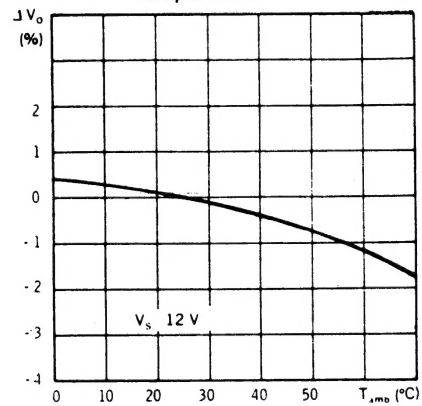


TEST CIRCUITS

Circuit No. 1 ($G_v = 50$)

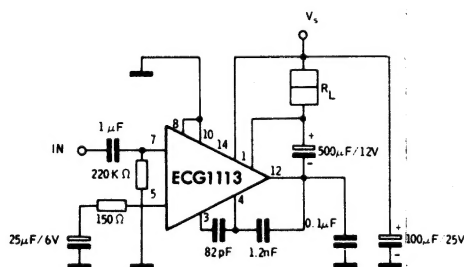

Circuit No. 2 ($G_v = 250$)

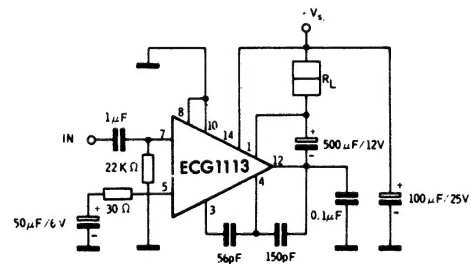

TYPICAL APPLICATIONS

Fig. 19 - Audio amplifier for radio.


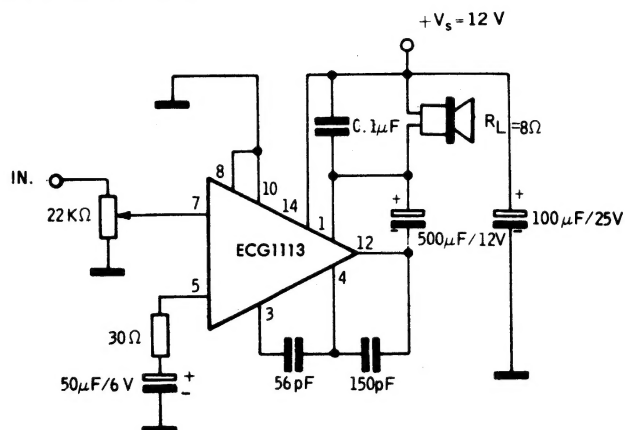


Fig. 20 - Audio amplifier for record-player.

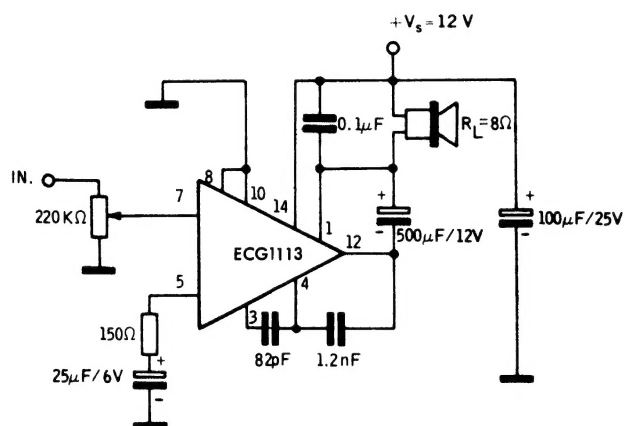

No responsibility is assumed by Sylvania for use of information contained herein nor for any infringements of patents or other rights of third parties which may result from its use.

GTE SYLVANIA
INCORPORATED
ELECTRONIC COMPONENTS GROUP/WALTHAM, MASS. 02154